

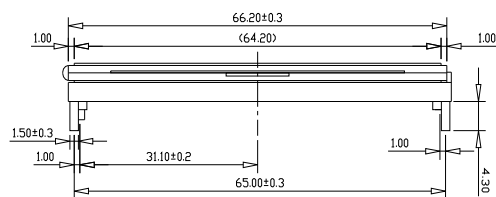


NO.	SIGNAL	NO.	SIGNAL
1	NC	23	D4
2	V0	24	D5
3	V1	25	D6
4	V2	26	D7
5	V3	27	LP
6	V4	28	FLM
7	VSS	29	M
8	TEST	30	OSCO
9	RES	31	OSCI
10	CS	32	CK
11	RS	33	CKS
12	M/S	34	PMODE
13	M86	35	VDD
14	P/S	36	VEE
15	SDA	37	CAP1-
16	SCL	38	CAP1+
17	WR	39	CAP2-
18	RD	40	CAP2+
19	DO	41	VOUT
20	D1	42	VR1
21	D2	43	VR2
22	D3		



Display Type	FSTN Positive Transflective
Operating Method	1/32 DUTY 1/7 BIAS
Viewing Angle	6:00
LCD Controller/Driver	LH155AF
VDD	3.3 V
VLCD	6.6 V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight	AMBER

NOTE:  
1.TOLERANCE UNLESS: ±0.5  
2.R0HS

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	TITLE	DRAWING NO.
01		FIRST ISSUE	DXD	2007-01-11		MODULE SPEC.	STR-TC0707
							PROJECT NO. S60707 VER. 04
							UNIT mm SCALE FIT
							3rd Angle  SHEET 1 OF 1
							TRUEVISION TECHNOLOGIES LTD