


I/F No:

No	Symbol
1	DATA
2	SCK
3	STB
4	VREF
5	VSS
6	VDD

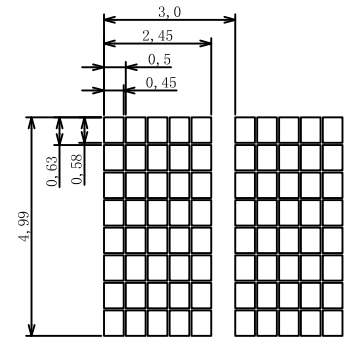

Dot size & Dot pitch

Display Type	TN POSITIVE TRANSMISSIVE
Front Polarizer	NORMAL
Driving Method	1/10 DUTY, 1/4 BIAS
Viewing Direction	6 O'CLOCK
LCD Driver IC	CC5027B/CGROM No.: 708
Logic Voltage (V)	5.0V
LCD Driving Voltage	3.7V
Operation Temperature	0°C TO 50°C
Storage Temperature	-20°C TO 70°C
Interface	SERIAL
Backlight	NIL

NOTES:
 1. GENERAL TOLERANCE:
 2. (∞) IS REFERENCE DIMENSION.
 3. * CRITICAL DIMENSION
 4. RoHS COMPLIANT.

				ME.CHECKED	HJW 2011-06-15	TITLE MODULE SPEC.	DRAWING NO. STR-TC3100			
				EE.CHECKED	ZY 2011-06-15		UNIT	mm	SCALE	FIT
				PE.CHECKED	WYL 2011-06-15		3rd Angle			
				APPROVED	DXH 2011-06-15		SHEET 1 OF 1			
01		FIRST ISSUE	HJW	11-07-06	CUSTOMER'S APPROVAL	BOM NO. : BM110623-02	TRUEVISION TECHNOLOGIES LTD			
VER.	SYMBOL	DESCRIPTION OF CHANGES	SIGN	DATE						