


NO.	SIGNAL
1	V0
2	V1
3	V2
4	V3
5	V4
6	C2-
7	C2+
8	C1+
9	C1-
10	VOUT
11	VSS
12	VDD
13	SDA
14	SCL
15	A0
16	RST
17	CS1B

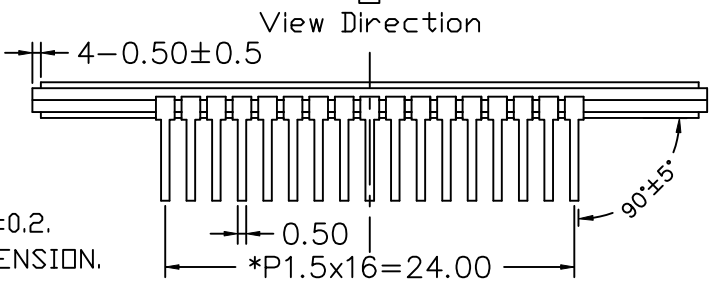

DOTs Detail  
Scale 10:1

NOTE:  
 1. GENERAL TOLERANCE: ±0.2.  
 2. (...) IS REFERENCE DIMENSION.  
 3. \* CRITICAL DIMENSION  
 4. COMPLIABLY RoHS.

Display Type	STN-Blue NEGATIVE TRANSMISSIVE
Operating Method	1/33 DUTY 1/6 BIAS
Viewing Angle	6:00
LCD Controller/Driver	ST7565R
Logic Voltage (V)	3.0V
LCD Driving Voltage	6.0V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
BACKLIGHT	None
Interface	4-Line SPI

					DRAWN		TITLE	DRAWING NO.			
					ME.CHECKED		MODULE SPEC.	STR-TG0811A			
					EE.CHECKED			UNIT	mm	SCALE	FIT
					PE.CHECKED			3rd Angle		SHEET 1 OF 1	
					APPROVED			TRUEVISION TECHNOLOGIES LTD			
01		First issue		JERRY	08.08.04	CUSTOMER'S APPROVAL					
VER.	SYMBOL	AMENDMENT		SIGN	DATE						