

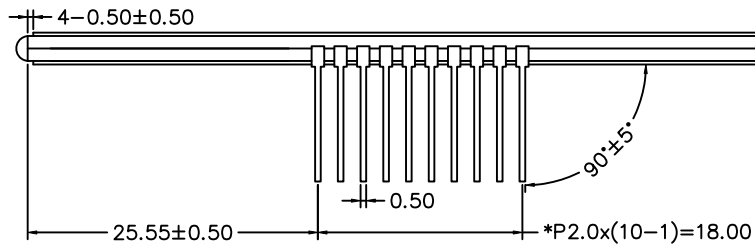


NO.	SIGNAL
1	VG
2	XVO
3	VO
4	VSS
5	VDD
6	SDA
7	SCL
8	A0
9	RSTB
10	CSB



- NOTE:
1. GENERAL TOLERANCE:  $\pm 0.2$ .
  2. (... ) IS REFERENCE DIMENSION.
  3. \* CRITICAL DIMENSION
  4. COMPLYABLY RoHS.

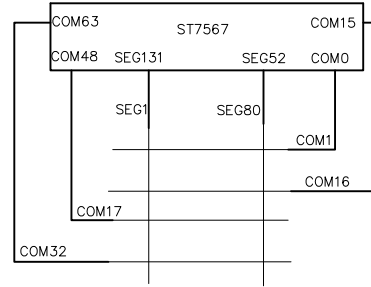

COM&SEG LAYOUT

DOTS Detail  
Scale 10:1

Display Type	FSTN POSITIVE REFLECTIVE
Operating Method	1/33 DUTY 1/6 BIAS
Viewing Angle	6:00
LCD Controller/Driver	ST7567
Logic Voltage (V)	3.0±0.2V
LCD Driving Voltage	6.0±0.2V
Operation Temperature	-30°C TO 60°C
Storage Temperature	-30°C TO 70°C
BACKLIGHT	None
Interface	4-Line SPI

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	LJW	TITLE	DRAWING NO.
01		FIRST ISSUE	LJW	13.04.22		EE.CHECKED	TJP	MODULE SPEC.	STR-TG3141
						PE.CHECKED	TJP	BOM NO.: BM130401-01A	UNIT mm SCALE FIT
						APPROVED	YB		3rd Angle  SHEET 1 OF 1
								TRUEVISION TECHNOLOGIES LTD	