



PIN ASSIGNMENT

No	Symbol
1	GND
2	VG
3	XVO
4	VO
5	VDD
6	VSS
7	CS0
8	A0
9	RST
10	SCL
11	SDA
12	GND

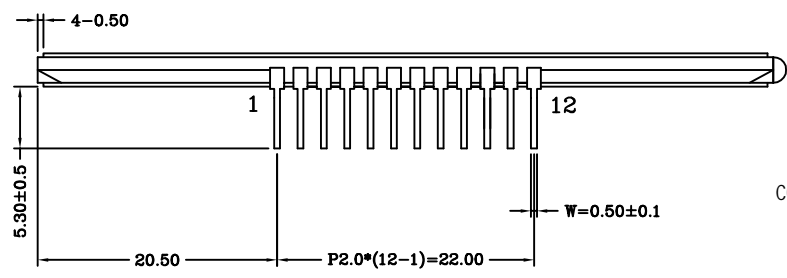

LAYOUT

Display Type	STN(GRAY)
	POSITIVE
	TRANSFLECTIVE
Front Polarizer	NORMAL
Operating Method	1/35 DUTY,1/7 BIAS
Viewing Angle	6 O'CLOCK
LCD Driver IC	ST7525
Operating Voltage	VDD=3.0V
Driver Voltage	VOP=8.5V
Operation Temperature	-10°C TO 60°C
Storage Temperature	-20°C TO 70°C
Interface	
Backlight	

- NOTE:
1. GENERAL TOLERANCE: ± 0.2 .
 2. (...) IS REFERENCE DIMENSION.
 3. * CRITICAL DIMENSION
 4. COMPLYABLY RoHS.

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	WKL	TITLE	DRAWING NO.			
						ME.CHECKED	TJP	MODULE SPEC.	STR-TG9305			
					EE.CHECKED	TJP			UNIT	mm	SCALE	FIT
					PE.CHECKED	HJB			3rd Angle		SHEET 1 OF 1	
01		first issue	Wukeliang	14.06.30		APPROVED		BOM NO.:BM140326-03B				
						TRUEVISION TECHNOLOGIES LTD.						